

# **PRAZI™**

# **BEAM CUTTER**

---


**USER'S  
MANUAL  
MODEL  
#PR-7000**

---

Please read  
this manual  
in its entirety  
before using  
the PRAZI  
Beam Cutter.

---

PRAZI USA  
214 Rear South Meadow Rd  
Plymouth MA, 02360  
(800)-262-0211  
[www.praziusa.com](http://www.praziusa.com)

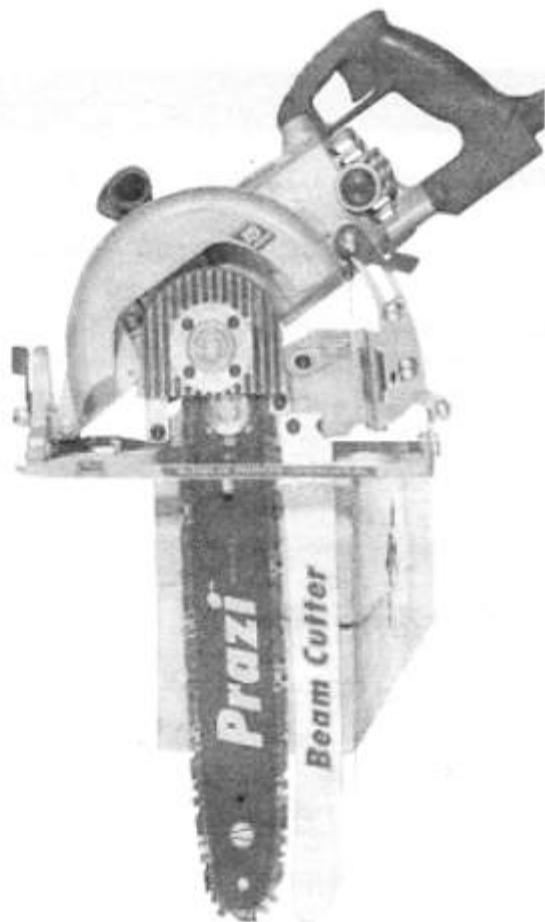

## BEFORE USING:

### BEFORE YOU BEGIN:

1. Read this owners manual in its entirety before installing or operating the Prazi Beam Cutter.
2. Read the owner's manual for you circular saw before installing or operating the Prazi Beam Cutter.

## IMPORTANT!!:

### TO AVOID DAMAGE TO THE BEAM CUTTER PLEASE READ BEFORE INSTALLING

#### IMPORTANT THINGS TO REMEMBER WHEN INSTALLING THE PRAZI BEAM CUTTER

1. Do not overtighten the main arbor bolt.
2. ALWAYS use the beveled washer on the main bolt when installing the Beam Cutter. Failure to do so will damage the main bearing housing.
3. be sure to loosen the hinge plate before installing. Beam Cutter must be parallel with the circular saw.
4. Be sure to lower foot plate of the circular saw before installing the Beam Cutter.
5. Due to design changes the Bosch and Skil wormdrive saws the lower retractable sawguard must be removed for the Beam Cutter to fit on.



### BOLT KIT PARTS LIST:

Part #	Qty.	Name	Application	*Application Key #	Manufacturer
P7012	1	Hex Key	All	1	Back & Decker
P7022	1	.788" Bushing	1,2,4,5	2	Craftsman
P7023	1	3/8" Arbor Bolt	1,2,4,5,7	3	Makita
P7025	1	8 mm Arbor Bolt	3	4	Milwaukee
P7027	1	Beveled Washer	All	5	Skil
P7042	2	Carrage Bolts	All	6	Dewalt
				7	Bosch

\*Complete parts breakdown is located on page 11.

# KNOW YOUR TOOL:

## **Prazi Beam Cutter** **Model PR-7000**

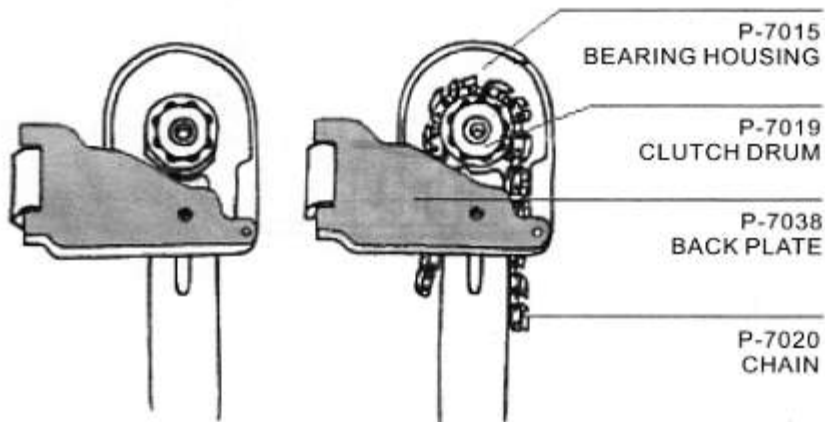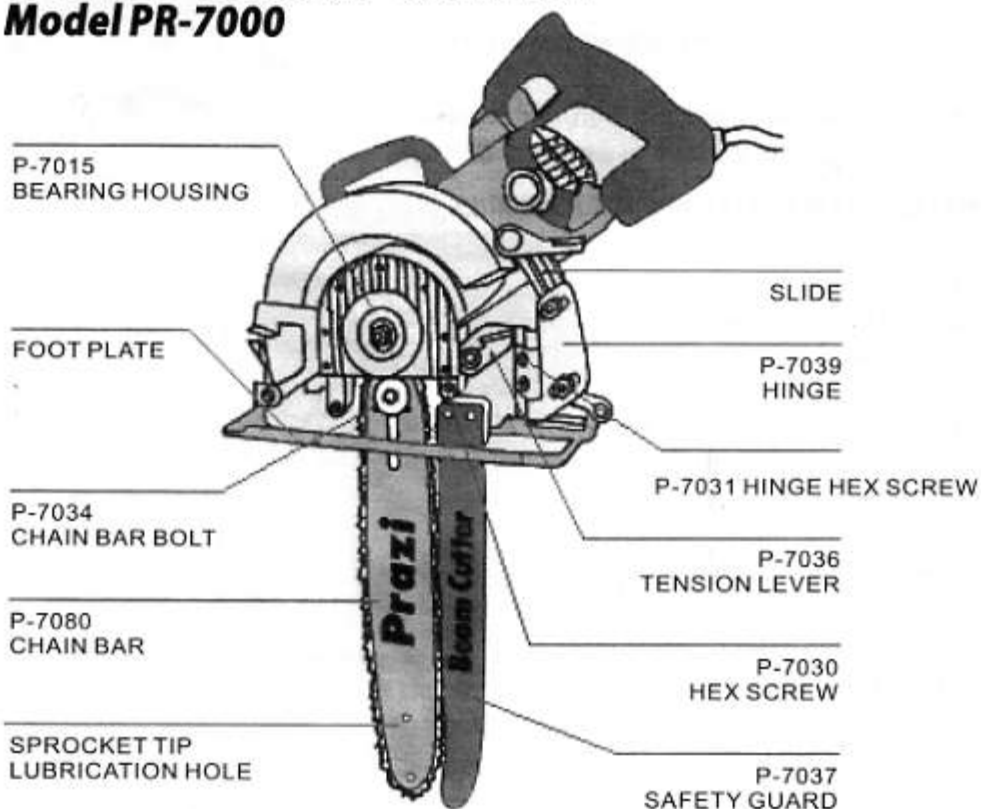


## INSTALLING THE PRAZI BEAM CUTTER™ Model PR-7000

**\*BE SURE SAW IS UNPLUGGED BEFORE INSTALLING BEAM CUTTER\***



### REMOVING CIRCULAR SAW BLADE

1. Open foot plate to it's fully-extended position.
2. While depressing lock button, remove blade bolt, outer washer, blade and inner washer or diamond.



### INSTALL BEAM CUTTER BLADE ASSEMBLY


3. Slip Bushing P7022 in place (No bushing is required for Makita saws)
4. With foot plate fully extended, slide Beam Cutter blade - first through the top of the table plate, then align the center hole of the Beam Cutter with the saw spindle.
5. Drop the Beam Cutter in place, making sure that the center hole of the Beam Cutter aligns with the spindle of the saw.

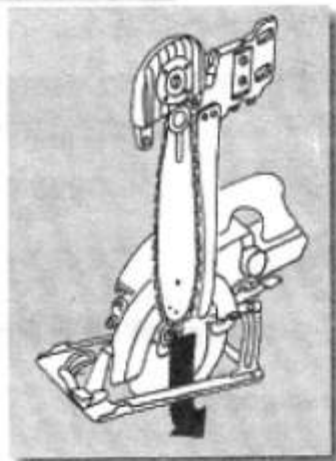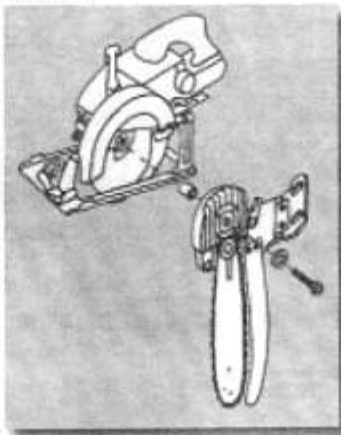


6. Loosen the 2 screws on the Beam Cutter hinge with 5/32" hex wrench.

7. Bolt hinge on Beam Cutter to slide on saw and finger-tighten. Bolts, washers and nuts are provided for this purpose.

**\*NOTE:** Be sure to use the beveled washer when attaching bolt for proper operation of the Beam Cutter.

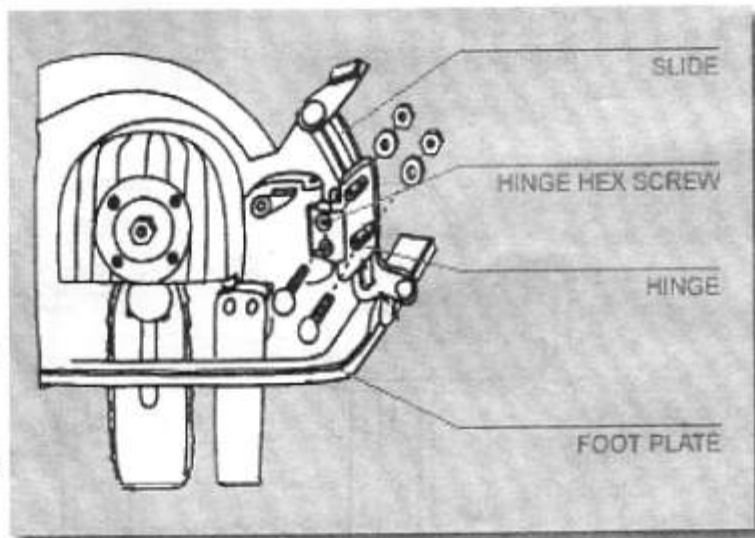

8. Screw bolt, with beveled washer on counterclockwise (#P7023 for Black & Decker®, Milwaukee®, Craftsman® and Skil® #P7025 for Makita®) through center hole in Beam Cutter. Make sure washer is on bolt - failing to use the supplied beveled washer may cause damage to the bearing.

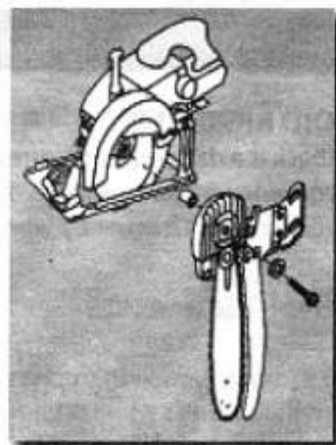

9. At this point, align Beam Cutter so that it is perpendicular (90°) to the foot plate of the saw.

## TIGHTEN BOLTS AND SCREWS

10. With the Beam Cutter properly aligned, and while depressing the lock button, tighten the master bolt with a 9/16" wrench.

11. Tighten the bolts holding the hinge plate to the slide with a 1/2" wrench.



**WARNING:** All chain-type cutting tools can kickback and cause loss of control of the tool and lead to the possibility of serious injury.

12. Tighten screws on hinge assembly with a 5/32" hex wrench.

**\*NOTE:** After installing the Beam Cutter, please check to make sure that there is enough tension on the chain. If more tension is desired, loosen the tension screw and hinge bolts (#P7042) and push the tension lever to achieve the desired tension level. Then re-tighten the tension screw.

## OPERATING PROCEDURES:

PLEASE INSPECT THE FOLLOWING BEFORE OPERATING THE BEAM CUTTER.

**CORD:** Inspect the cord and extension cord for damage.

**OIL:** Oil or lubricate the chain before use

**Chain:** Inspect for proper tension and sharpness

**Secure:** Make sure that all loose clothing or long hair is secure before use.

**READ:** Please read the safety section to better prevent the danger of kickback

## OPERATING PROCEDURES CONTINUED:

### AVOID KICKBACK!!

Kickback is a dangerous occurrence where the saw has a tendency to kick back toward the user when it encounters resistance. Kickback results in a backward and/or upward motion of the saw and occurs most frequently when attempting to cut too close to the tip of the guide bar.

### To Avoid Kickback:

**ALWAYS** work with a sharp, tight chain and support your work properly.

**If the chain binds** while making a cut, or when making an incomplete cut, release the trigger and hold the saw still until the chain comes to a stop.

**DO NOT** attempt to remove the saw from the work while the chain is moving.

**PULL** the trigger and allow the chain to reach full speed before resuming or starting a cut.

**ALWAYS** use two hands and maintain a firm grip.

**DO NOT** attempt to cut material above shoulder height.

**DO NOT** attempt to cut in awkward positions.

### Operating Hints:

- Always secure material to be cut.
- For rip cuts, use a fence to make smooth, straight cuts.
- Do not allow scraps to build up beneath blade.
- Keep chain sharp and well lubricated.
- Keep work area clean and clutter free.
- Grasp saw with a firm grip, using both hands.



WEAR SAFETY GOGGLES WITH SIDE SHIELDS FOR EYE PROTECTION WHEN OPERATING THE BEAM CUTTER OR ANY OTHER POWER TOOL

## ADJUSTING CHAIN TENSION:

Chain tension should be checked before any cutting and also periodically throughout the job. To adjust chain tension, follow these steps:

### FINE ADJUSTMENT

REMOVE THE BEAM CUTTER FROM THE SAW BEFORE PERFORMING FINE ADJUSTMENT



ALWAYS USE HEAVY DUTY GLOVES WHEN HANDLING THE CHAIN TO PREVENT ACCIDENTAL INJURY TO HANDS OR FINGERS.

## ADJUSTING CHAIN TENSION CONTINUED:

1. Loosen the chain adjustment tension lever screw and hex screw above the tension lever with a 5/32" hexkey wrench.
2. **VERY IMPORTANT** - Loosen hinge bolts before performing fine adjustment.
3. Push the lever down to obtain proper tension.
4. Re-tighten the lever screw and hex bolt.


### GROSS ADJUSTMENT

The fine adjustment is only effective up to 1/8" adjustment. For more adjustment, loosen the chain bar bolt (P7034) and slide the chain bar downward to tighten the chain.

#### IMPORTANT:

If you have any questions concerning the installation operation, maintenance, or safety procedures of the Prazi Beam Cutter please call us toll free:

**1-800-262-0211**

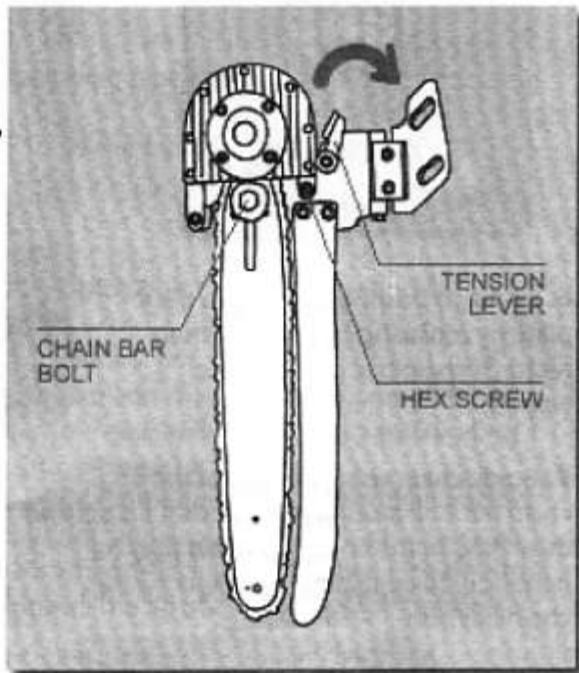

## CHANGING THE CHAIN:



### FOLLOW THESE STEPS

1. Remove Beam Cutter from saw.
2. Remove chain bar by first removing chain bar retention bolt and washer.
3. Separate bearing housing from back plate by unscrewing hex screws with 5/32" hex key




4. Make sure chain cutters face in the direction of rotation.

5. Place chain behind clutch drum and onto sprocket teeth.

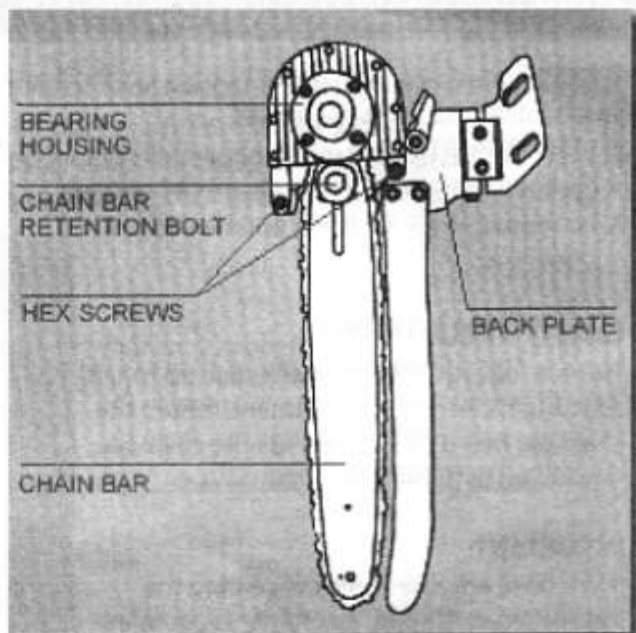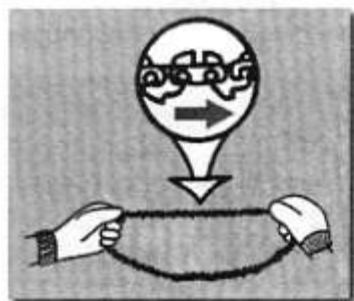


6. Reattach bearing housing to back plate by replacing hex screws, then reattach chain bar with bolt and washer.

7. Guide chain along the top of the chain bar and around the sprocket tip, setting drive links in the chain bar rail. It may be necessary to adjust the sprockets on the chain bar nose.

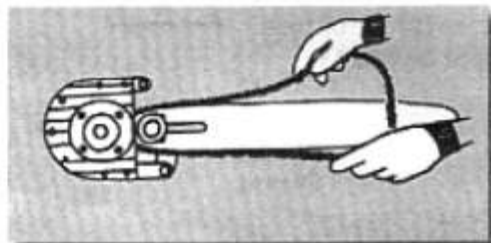

8. Pull chain bar forward to take up slack in the chain and tighten bolt with wrench to firmly secure it. Make sure the chain fits in chain bar rail along bottom of bar. Move chain back and forth to make sure it is in mesh with the sprocket and that chain drive links are lined up with the chain bar rails.

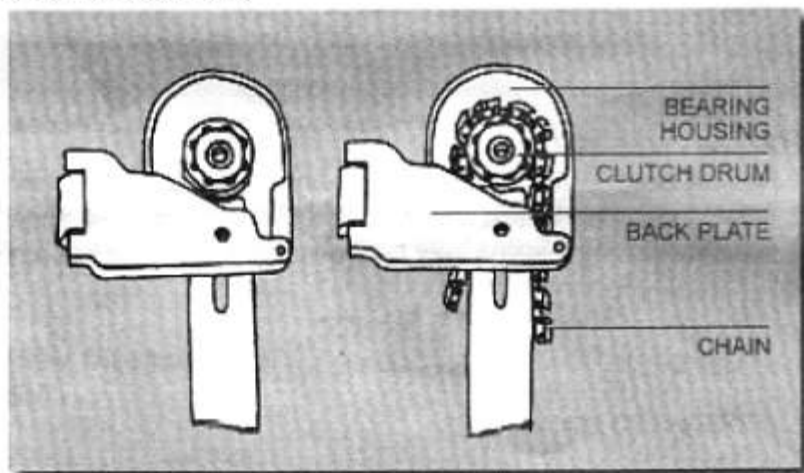



## MAINTENANCE GUIDELINES:

BE SURE SAW IS UNPLUGGED BEFORE PERFORMING MAINTENANCE ON YOUR BEAM CUTTER

### CIRCULAR SAW


Please follow saw manufacturer's guidelines for proper maintenance.

### BEAM CUTTER CHAIN BAR

Keep the chain bar sprocket tip well lubricated with frequent applications of lubricant to the chain bar tip.


When lubricating the sprocket tip, wear heavy gloves and make sure the power cord is unplugged.

1. Clean the sprocket tip to remove any debris.
2. Insert the tip of the lubricating gun into the lubrication hole and inject grease until it appears on the outside edge of the sprocket tip.
3. Rotate the chain by hand and repeat the procedure until the entire sprocket tip is lubricated.



4. Spraying the bar and chain with a silicone lubricant is very effective for keeping the chain sharp and running smoothly. Spray every 10 or 15 cuts.

5. The Prazi Beam Cutter runs much slower than a chain saw and does not require as much lubricant. Clean the chain bar rails when they appear dirty and each time the chain is removed. The tip of a screwdriver works well for this job.

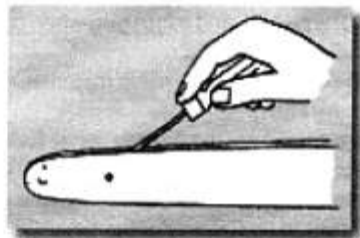

### CHAIN

**Maintain** proper chain tension. Proper tension is important and should be checked before each use.

**Always** keep chain clean and sharp to prevent kickback and to ensure optimal performance and safety.

**New chains** will require adjusting after as few as 5 cuts. This is normal, as new chains often will stretch.

**File** diameter of chain is 5/32" or 4.5mm.

## MAINTENANCE CHART

Maintenance Procedure	Before Each Use	After Each Use	As Needed
CHECK CHAIN TENSION	X		
OIL CHAIN	X		
LUBRICATE SPROCKET TIP		X	
CLEAN CHAIN		X	
SHARPEN CHAIN BLADES			X
CLEAN CHAIN BAR RAILS			X

## GENERAL SAFETY TIPS:

1. Wear tight fitting clothes. Keep all parts of your body, clothing and jewelry away from the saw during the saw chain during use.
2. Wear safety goggles for eye protection.
3. Wear heavy duty safety work shoes or boots.
4. Keep children, animals and other bystanders well away from the work area.
5. Make sure the saw is properly grounded before use- consult your circular saws owner's manual.

## BEAM CUTTER SAFETY PROCEDURES:

1. Make sure that all screws and nuts are tight and that chain tension is correct before using.
2. Always keep the blade in front of you while cutting- never try to cut toward your body.
3. Use the Beam Cutter for lumber and wood building products only- NEVER use the Beam Cutter to cut trees, vines, plastics, or metals.
4. Always use BOTH HANDS and a firm grip when operating the Beam Cutter. Use your thumb to encircle the handles for best grip.
5. Do not place hot saw near flammable materials.
6. Keep handles dry and grease free.
7. Do not operate saw under medication, while feeling fatigued, or while drinking alcohol.
8. Do not operate saw during hazardous weather conditions such as rain or snowfall.
9. Do not operate saw in awkward positions that require outstretched arms or one-handed use.
10. If your arms start to feel heavy or become stiff, STOP immediately and rest. Resting periodically is a good practice you should not operate the saw for prolonged periods.
11. Do not try to stop a moving chain with any object or bodily part such as hand or foot.
12. Never leave the saw unattended, especially if children are present.
13. Do not allow sawdust or other debris to build up on the saw, blade, or motor.
14. Never remove the kickback guard or other safety device from your Beam Cutter or circular saw.
15. If unfamiliar with proper chain sharpening techniques, take your blade to your nearest Prazi distributor.
16. Always make sure power cord is unplugged before changing chain, installing Beam Cutter assembly, lubricating chain, or performing any other maintenance on your saw.
17. PREVENT KICKBACK! Please thoroughly review the kickback prevention techniques explained on page 6.

## PARTS LIST for PRAZI BEAM CUTTER - Model PR-7000

PART #	DESCRIPTION
P7020	CHAIN
P7080	BAR FOR CHAIN
P7012	5/32" HEX KEY
P7015	BEARING HOUSING
P7016	BEARING
P7017	BEARING RETAINER RING
P7018	SPACER STEP RING
P7019	CHAIN DRIVE GEAR
P7045	SHAFT ADAPTER
P7022	.788 LENGTH BUSHING
P7023	3/8 - 24 L.H. BOLT 1-1/2" LENGTH
P7025	8mm - 1.25 L.H. BOLT 2-1/2" LENGTH
P7027	3/8" I.D. THICK WASHER
P7028	5/16" I.D. THICK WASHER
P7029	10-24 x 3/8" BUTTON HEAD SCREW
P7030	1/4" - 20 x 1" BUTTON HEAD SCREW
P7031	1/4" - 20 x 1/2" BUTTON HEAD SCREW
P7032	1/4" I.D. SPRING WASHER
P7033	NYLON 1/4" I.D. WASHER
P7034	5/16" - 18 X 1" BOLT
P7035	BAR WASHER 5/16" I.D. x 1-5/8"
P7036	ADJUSTING LEVER
P7037	SAFETY (KICKBACK) GUARD
P7038	MAIN PLATE ADAPTER
P7039	HINGE PLATE
P7B	COUPLER BOLT KIT FOR PR-7000
P7070	CUSTOM CARRYING CASE FOR BEAM CUTTER

### To Order Parts Call

1-800-262-0211 or 1-508-747-1490 • FAX: 1-508-746-8655

Mon-Fri - 8:30am to 5:00pm (EST)

---

## LIMITED LIFETIME WARRANTY

---

### **What is covered under the lifetime warranty?**

This **warranty** covers all defects in workmanship or materials and normal wear items in this PRAZI tool for the lifetime of the tool. Warranties for other PRAZI USA products may vary.

### **How to obtain warranty service.**

To obtain service for this PRAZI USA tool you must return it, freight prepaid, to PRAZI USA. You may obtain the location of PRAZI USA, by calling (toll free) 1-800-262-0211 or by logging on to the PRAZI USA web site, [www.praziusa.com](http://www.praziusa.com). When requesting **warranty** service, you must present the proof of purchase documentation, which includes a date of purchase. PRAZI USA will replace any part covered under the **warranty**, at our option at no charge to you.

### **What is not covered?**

This warranty applies only to the original purchaser at retail and may not be transferred. This warranty only covers defects arising under normal usage and does not cover malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification or repair by others.

**\*PRAZI USA makes no warranties, representations or promises as to the quality or performance of its tools other than those stated in its warranty.**

### **Additional limitations.**

To the extent permitted by applicable law, all implied warranties, including warranties of **Merchantability or Fitness for a Particular purpose**, are disclaimed. Any implied warranties, including warranties of Merchantability or Fitness for a Particular Purpose, that cannot be disclaimed under state law are **limited** to three years from the date of purchase. PRAZI USA, is not responsible for direct, indirect, incidental or consequential damages. Some states do not allow limitations on how long an implied **warranty** lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This **warranty** gives you specific legal rights, and you may also have other rights, which may vary by state.